

Fully-developed, pressure-driven flow of an incompressible, isothermal fluid through a plane closed channel flow : data from DNS

Reference: Direct numerical simulation of turbulent open channel flow: Streamwise turbulence intensity scaling and its relation to large-scale coherent motions, *proceedings of the 10th iTi conference on turbulence*, 2023.

Note that a publication is in process. When using the data please check

www.ifh.kit.edu/dns_data/channel/smooth/closed/

again for the final reference.

Description of the flow

We are considering the flow of an incompressible and isothermal fluid in a plane closed channel flow of half-height h (cf. figure 1). The flow field is assumed to be periodic in stream- and spanwise direction over periods of length L_x and L_z , respectively. A constant flow rate is imposed at each time step.

Flow parameters

The problem is governed by a single parameter, the bulk Reynolds number $Re_b = u_b h / \nu$, where u_b is the bulk velocity and ν the kinematic viscosity. Table 1 shows the simulated Reynolds number values.

Numerical method

The data was obtained from direct numerical simulations of closed channel flow using a pseudo-spectral method which solves the wall-normal velocity/vorticity formulation of the Navier-Stokes equation introduced by Kim et al. [1].

- Euler implicit scheme for the viscous terms;
- three-step low-storage Runge-Kutta method for the non-linear terms;
- truncated Fourier series in streamwise and spanwise directions (2/3 de-aliasing), Chebyshev polynomials in the wall-normal direction on a Chebyshev-Gauss-Lobatto (CGL) grid;
- no-slip and impermeability boundary conditions at the bottom wall the top wall, periodic boundary conditions in z direction;

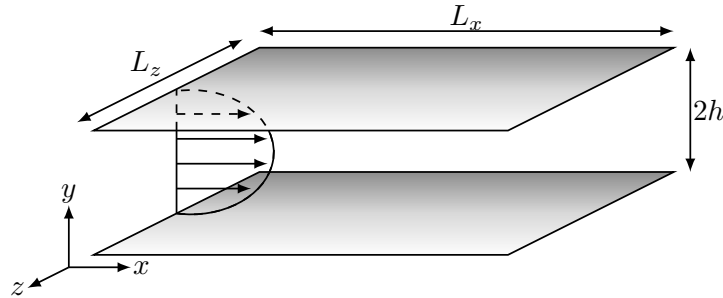


Figure 1: The geometry of the problem and the computational domain.

Numerical parameters

The data included in this repository is characterized by the following features:

- friction Reynolds numbers: $200 \leq Re_\tau \leq 890$.
- streamwise domain length: $L_x = 12\pi h$.
- spanwise domain length: $4\pi h \leq L_z \leq 12\pi h$.
- time step: $CFL \leq 0.5$;
- streamwise grid spacing: $\Delta x^+ \leq 15$;
- spanwise grid spacing: $\Delta x^+ \leq 5.5$;
- maximum wall-normal grid-spacing: $max(\Delta y^+) \leq 7.3$;

case	Re_τ	Re_b	L_x/h	L_z/h	N_x	N_y	N_z	Δx^+	Δz^+	Δy_{min}^+	Δy_{max}^+
C200	199.71	3170	12π	4π	768	129	512	9.8	4.9	0.06	4.90
C200W12	199.73	3170	12π	12π	768	129	1536	9.8	4.9	0.06	4.90
C400	396.96	6969	12π	4π	1536	193	1024	9.8	4.9	0.05	6.49
C600	593.14	11047	12π	4π	1536	257	1536	14.6	4.9	0.04	7.28
C900	889.15	17512	12π	4π	3072	385	2048	11.0	5.5	0.03	7.27
		case	ν		u_τ		u_b		$t_{stat}u_b/h$		
		C200	2.10287e-04		0.0419971		0.666667		8600		
		C200W12	2.10287e-04		0.0420004		0.666667		3403		
		C400	9.56608e-05		0.0379735		0.666667		3260		
		C600	6.03501e-05		0.0357958		0.666667		1757		
		C900	3.80692e-05		0.0338494		0.666667		1013		

Table 1: Simulation parameters: bulk Reynolds number Re_b , friction-velocity Reynolds number Re_τ , number of streamwise and spanwise Fourier mode N_x and N_z , number of wall-normal Chebyshev polynomials N_y , streamwise and spanwise grid spacing in wall units Δx^+ and Δz^+ , minimum and maximum wall-normal grid spacing in wall units Δy_{min}^+ and Δy_{max}^+ , respectively, kinematic viscosity ν , friction velocity u_τ , bulk velocity u_b , statistics interval t_{stat} in bulk units.

Available data

The folders are structured as follows. Each case folder contains statistical data in ASCII file format similar to the ones provided by <https://turbulence.oden.utexas.edu/>. Statistical quantities are obtained by averaging in time as well as in streamwise and spanwise direction. They are usually normalised in wall units, otherwise mentioned in the data file header.

profiles: wall-normal profiles of one-point statistics

<i>case.means</i>	mean velocity profile
<i>case.reystress</i>	Reynolds stress profiles
<i>case.vort</i>	root-mean-square vorticity profiles
<i>case.tautot</i>	shear stress profiles
<i>case.velp</i>	velocity-pressure correlation profiles
<i>case.highorder</i>	velocity skewness and flatness profiles

corr: 1D two-point correlations at different wall distances

<i>case.xcorr.yplus</i>	streamwise velocity correlations at $y^+ = yplus$
<i>case.zcorr.yplus</i>	spanwise velocity correlations at $y^+ = yplus$

<i>case.xspec.yplus</i>	streamwise velocity spectra at $y^+ = yplus$
<i>case.zspec.yplus</i>	spanwise velocity spectra at $y^+ = yplus$

ruu_reX_ypY_Zp.dat	positive streamwise velocity correlation iso-contours at $Re = X$, $y^+ = Y$ in $Z=b(ulk)/w(all)$ units
ruu_reX_ypY_Zp.dat	negative streamwise velocity correlation iso-contours at $Re = X$, $y^+ = Y$ in $Z=b(ulk)/w(all)$ units

doi.org/10.4121/88678f02-2a34-4452-8534-6361fc34d06b
www.ifh.kit.edu/dns_data/channel/smooth/closed/

Markus Uhlmann
Institute for Hydromechanics
Karlsruhe Institute of Technology (KIT)
76131 Karlsruhe, Germany
markus.uhlmann@kit.edu

[1] John Kim, Parviz Moin, and Robert Moser. Turbulence statistics in fully developed channel flow at low Reynolds number. *Journal of Fluid Mechanics*, 177:133–166, 1987. doi:[10.1017/S0022112087000892](https://doi.org/10.1017/S0022112087000892).

<https://torroja.dmt.upm.es/turbdata/>
<https://turbulence.oden.utexas.edu/>
<http://www.vremanresearch.nl/channel.html>
<https://jaxa-dns-database.jaxa.jp/channelflow.html>
<http://newton.dma.uniroma1.it/channel/>